



ACCESSORIES

Winged wall plug: designed for plug-in installation into an \varnothing 8mm hole in the wall. The protruding head enables the cable bundle to be fixed at a set distance from the wall.




Code	Description	Max. width cable ties, mm	Size mm	PCS per bag	PCS per carton
ALE.3.401	Black nylon winged plug	9	10 x 43	100	5000


Installation:

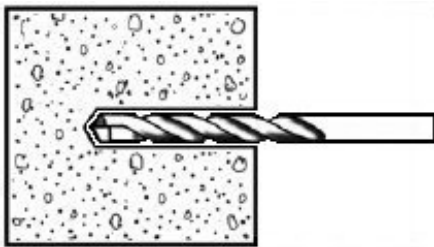

Drill an 8 mm \varnothing hole to a depth of 40 mm

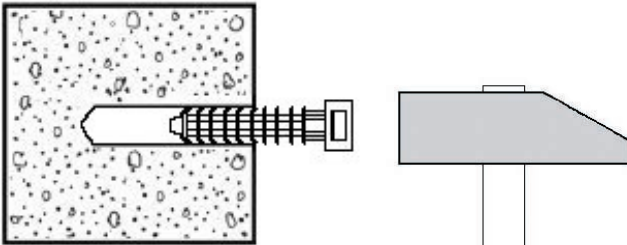


Tap in the wall plug.

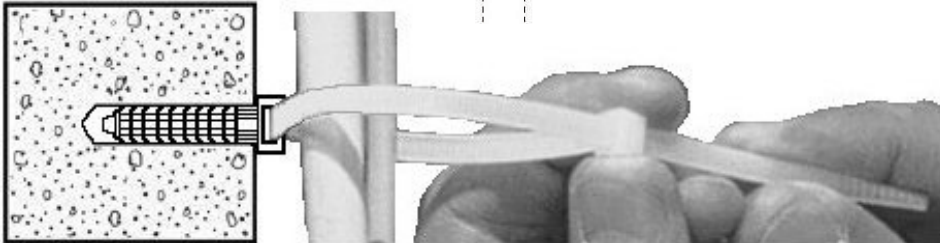

Slot a cable tie or collar of a maximum width of 9 mm into the head and complete the fixing.

Technical characteristics:

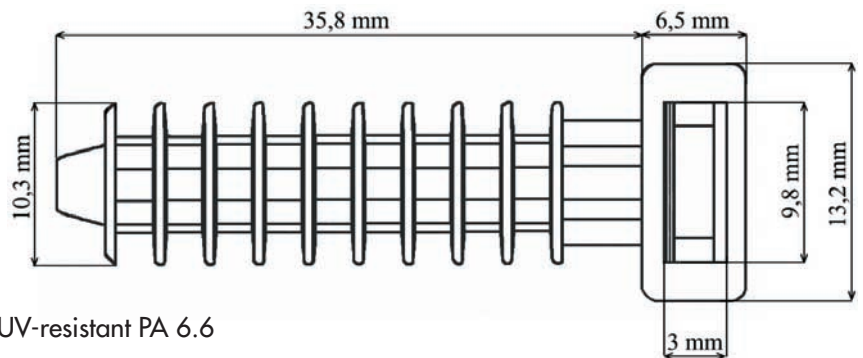

Material: Black UV-resistant PA 6.6
 Minimum Application Temperature: 10°C
 Work Temperature: -40°C ÷ +65°C
 Average pull-out load: 30Kg
 Recommended work load: 15Kg
 Warning. Preferred applications: solid brick, concrete, and all compact materials.




ACCESSORIES

Threaded winged plug : the screw-on support can be replaced with another threaded head.




Code	Description	Max. width cable ties, mm	Size mm	PCS per bag	PCS per carton
ALF.3.401	Threaded wall plug Ø 10	9	10 x 38,8	100	5000
SUF.3.401	Winged support Ø 7 Thread 1.5 mm	9	10 x 12,5	100	5000


Installation:

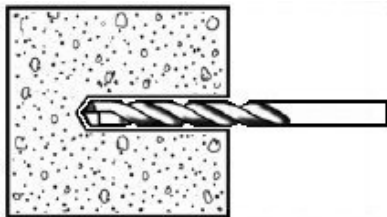

Drill an 8 mm Ø hole to a depth of 40 mm

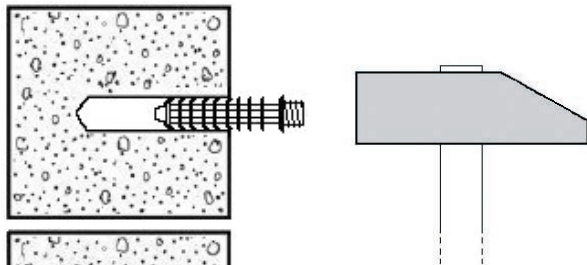

Tap in the wall plug.

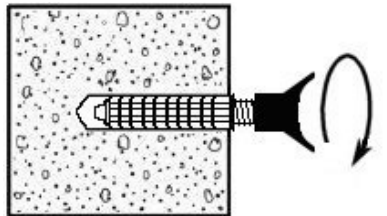


Screw on the saddle-shaped support without using undue force.




Slot a cable tie or collar of a maximum width of 9 mm into the head and complete the fixing.

Technical characteristics:

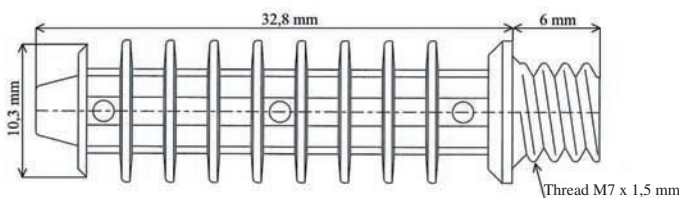


- Screw threading: Ø 7 mm – Thread 1.5 mm
- Material: Black UV-resistant PA 6/6
- Minimum Application Temperature: 10°C
- Work Temperature: -40°C ÷ +65°C
- Average pull-out load: 30Kg
- Recommended work load: 15Kg
- Warning. Preferred applications: solid brick, concrete, and all compact materials.

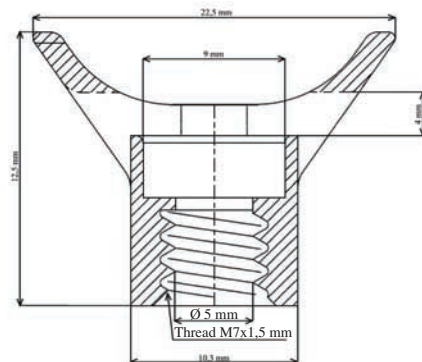



Rod and pipe support: designed to fix two pipes to the wall at a set distance and in parallel with each other using two 9 mm collars.

Code	Description	Max. width cable ties, mm	Size mm	PCS per bag	PCS per carton
SUP.3.402	Black nylon rod and pipe support	9		100	3000

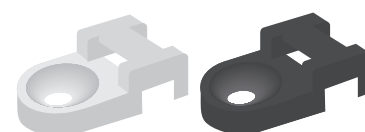


Natural or black V2 nylon self-extinguishing cable support to be used with screw and wall plug for fixing a cable tie to the wall.

Code	Description	Max. width cable ties, mm	Size mm	PCS per bag	PCS per carton
SUP.2.405	Natural nylon eyelet support Ø 3.8 mm	5		100	3000
SUP.3.405	Black nylon eyelet support Ø 3.8 mm	5		100	3000




Natural or black V2 nylon self-extinguishing, saddle cable support to be used with screw and wall plug for fixing a cable tie to the wall. The spacer pin keeps the cable from coming in contact with the wall, thus safeguarding electrical insulation.

Code	Description	Max. width cable ties, mm	Size mm	PCS per bag	PCS per carton
SUP.2.401	Saddle natural nylon support Ø 5 mm	9		100	3000
SUP.3.401	Saddle black nylon support Ø 5 mm	9		100	3000

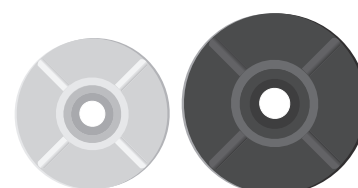

Natural or black V2 nylon bases, self-extinguishing, non-dual adhesive. The cables are fixed to the wall by slotting the cable ties through the eyelets. The round or square shape of the support reduces bulkiness. Applied using screws and anchors.


Code	Description	Max. width cable ties, mm	Size mm	PCS per bag	PCS per carton
BAS.2.401	Natural nylon base, non-dual adhesive	4	Ø 20	100	3000
BAS.2.402	Natural nylon base, non-dual adhesive	6	Ø 28	100	3000
BAS.3.401	Black nylon base, non-dual adhesive	4	Ø 20	100	3000
BAS.3.402	Black nylon base, non-dual adhesive	6	Ø 28	100	3000

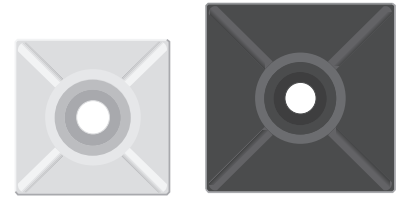


Square nylon bases.

Code	Description	Max. width cable ties, mm	Size mm	PCS per bag	PCS per carton
BAS.2.405	Natural nylon square base, non-dual adhesive	4	∅ 19	100	3000
BAS.2.406	Natural nylon square base, non-dual adhesive	6	∅ 27	100	3000
BAS.3.405	Black nylon square base, non-dual adhesive.	4	∅ 19	100	3000
BAS.3.406	Black nylon square base, non-dual adhesive	6	∅ 27	100	3000

Dual-adhesive V2 nylon bases in natural or black, self-extinguishing. The cable ties are slotted through the eyelets for fixing cables or other items to the wall. The round or square shape reduces bulkiness. The bases come with the **adhesive already applied**. Walls must be smooth and grease-free.

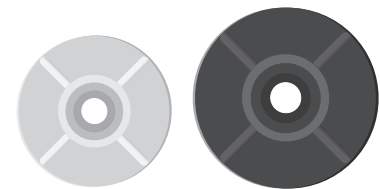

Code	Descrizione	Max. width cable ties, mm	Size mm	Pull load, daN	PCS per bag	PCS per carton
BAS.2MT.501	Natural nylon base with dual adhesive	4	∅ 20	10	100	3000
BAS.2MT.502	Natural nylon base with dual adhesive	6	∅ 28	16	100	3000
BAS.3MT.501	Black nylon base with dual adhesive	4	∅ 20	10	100	3000
BAS.3MT.502	Black nylon base with dual adhesive	6	∅ 28	16	100	3000

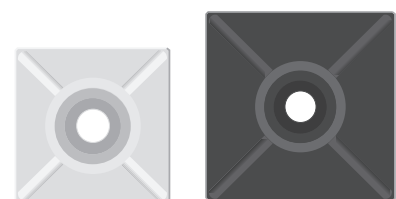

Square, dual-adhesive nylon bases

Code	Description	Max. width cable ties, mm	Size mm	Pull load, daN	PCS per bag	PCS per carton
BAS.2MT.507	Natural nylon square base, with dual adhesive	4	∅ 19	10	100	3000
BAS.2MT.508	Natural nylon square base, with dual adhesive	6	∅ 27	16	100	3000
BAS.3MT.507	Black nylon square base, with dual adhesive	4	∅ 19	10	100	3000
BAS.3MT.508	Black nylon square base, with dual adhesive	6	∅ 27	16	100	3000

Dual-adhesive clips in self-extinguishing natural or black V2 nylon. The special support is designed for the quick insertion and removal of one or more cables without compromising the cable insulation. Suitable for cables of up to 15 mm Ø.



Code	Description	L x h mm	Cable diameter	Pull load, daN	PCS per bag	PCS per carton
GAN.2MT.401	Clip in natural nylon with dual adhesive	19 x 10	5	10	100	3000
GAN.3MT.401	Clip in black nylon with dual adhesive	19 x 10	5	10	100	3000
GAN.2MT.402	Clip in natural nylon with dual adhesive	26 x 13	10	16	100	3000
GAN.3MT.402	Clip in black nylon with dual adhesive	26 x 13	10	16	100	3000
GAN.2MT.403	Clip in natural nylon with dual adhesive	26 x 18	15	16	100	1500
GAN.3MT.403	Clip in black nylon with dual adhesive	26 x 18	15	16	100	1500


Identification tags in self-extinguishing natural V2 nylon. Four slots to house cable ties measuring up to 5 mm in width and 1.5 mm thick. Tags come in a usable size of 20x40 mm and can be labelled or marked with an indelible pen.



Code	Description	Max. width cable ties, mm	Size mm	PCS per bag	PCS per carton
PID.101	Natural nylon identification tags	5	20 x 40 x 1,3	100	3000

FIXING TOOLS

Collar fastening and cutting pliers. Facilitate the tightening and cut of collars. Non-calibrating, leaves a short length of tail close to the head. Metal tool very useful for fastening collars. Maximum width 9 mm.




Code	Description	Max. width cable ties, mm	Load calibration, daN	
			from	to
PIN.005	Collar fastening and cutting pliers	9	—	—

5 mm cable-tie tensioning tool. Suitable for cable ties up to 5 mm wide. This metal tool helps to adjust the preload, cutting the preceding residual part.



Code	Description	Max. width cable ties, mm	Load calibration, daN	
			from	to
PIN.003	Metal pliers with preload adjuster	5	3.5	12

8 mm cable-tie tensioning tool. Suitable for cable ties up to 8 mm wide. In special glass-fibre reinforced resin, this tool enables the user to adjust the preload from a minimum of 2.5 kg to a maximum of 14 kg, and cuts the residual part.



Code	Description	Max. width cable ties, mm	Load calibration, daN	
			from	to
PIN.004	Plastic pliers with preload adjuster	8	2.5	14